




**We shape your safety**  
**Light and ventilation systems**

[www.mercor.com.pl/en/](http://www.mercor.com.pl/en/)



over **30 000** m<sup>2</sup> of production space  
 located on **16** ha of plots housing **7** production facilities

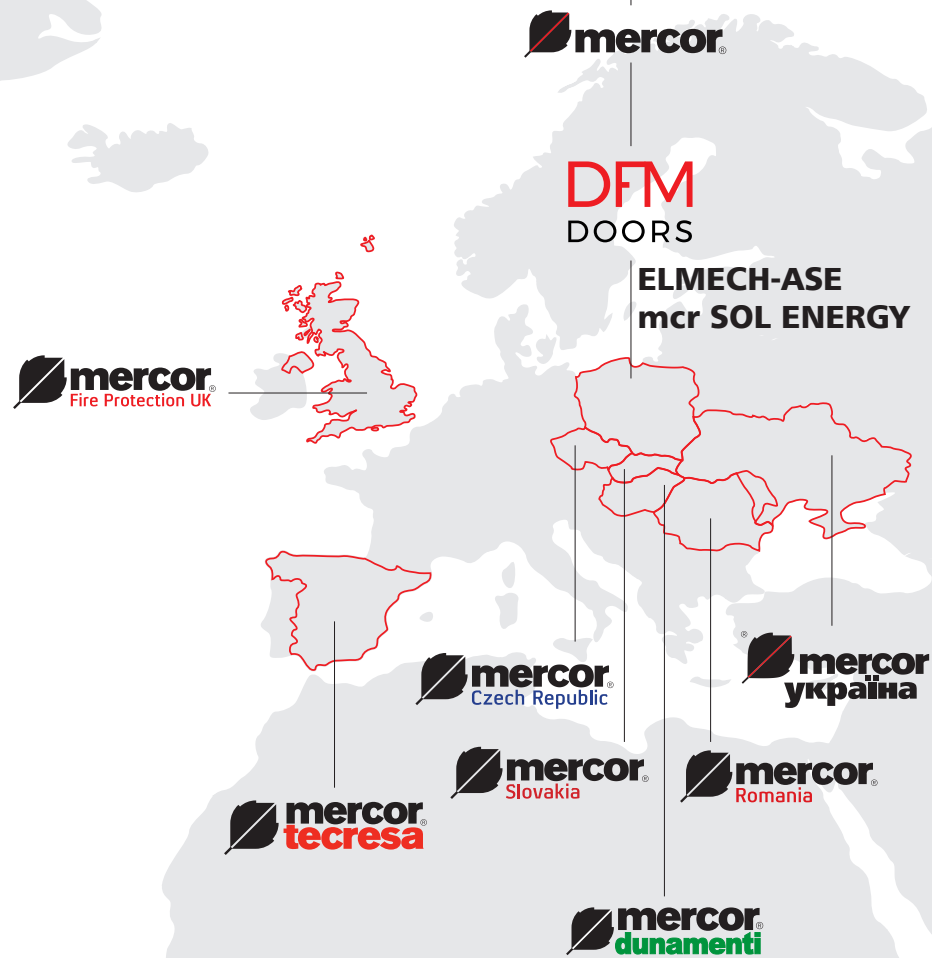

**4** product divisions:  
 » gravitational smoke exhaust  
 » fire ventilation  
 » building structure protections  
 » fire partitiones provided by DFM Doors company

over **750** people working  
 for the Mercor Group

**Stable** technological advancement  
 automation, software and production management intelligent solutions

**10** subsidiaries  
 supplying over **50** markets worldwide

**production supported by IT systems**  
 tj. ERP, Vault, and trademark Shop Floor Software

## ➤ MERCOR GROUP HAS BEEN PROVIDING SMOKE AND HEAT EXHAUST SYSTEMS FOR OVER 30 YEARS.

We are one of the largest Polish entities operating within the branch of passive fire protection systems. We form an international group of companies which is among the industry's leaders on the European market. Our comprehensive offer includes: smoke and heat exhaust systems, rooflight systems, fire ventilation systems, as well as fire protections of building structures. We also provide full service support to our Clients.

We have provided safety for over 30 years. Our company portfolio comprises hundreds of projects completed domestically and abroad. We combine our many years' experience with innovativeness, creating new solutions designed to face the challenges posed by today's building industry.

We are a public company. "MERCOR" S.A. has been listed on the Warsaw Stock Exchange since July 2007.

In providing comprehensive services, we strictly

co-operate with building designers and constructors. We offer help in selecting and designing fire protection systems; we design equipment forming part of those systems, delivering them and installing on site. We also provide full-ranged service, constituting the guarantee of long-term reliability of our systems.

The majority of our assortment is custom-manufactured on individual orders; our customers can specify the demanded product parameters, subject to regulatory safety standards and requirements.

<b>1.   mcr PROLIGHT</b>	<b>&gt; 8</b>
1.1.   mcr PROLIGHT continous rooflights	> 8
1.2.   mcr PROLIGHT smoke vents	> 10
1.3.   mcr PROLIGHT skylights	> 12
1.4.   mcr PROLIGHT roof hatches	> 14
<b>2.   mcr ULTRA THERM</b>	<b>&gt; 16</b>
2.1.   mcr ULTRA THERM smoke vents	> 18
2.2.   mcr ULTRA THERM skylights	> 20
2.3.   mcr ULTRA THERM roof hatches	
<b>3.   mcr S-THERM</b>	<b>&gt; 22</b>
3.1.   mcr S-THERM smoke vents and skylights	> 24
<b>4.   mcr OSO THERM</b>	<b>&gt; 26</b>
4.1.   mcr OSO THERM smoke exhaust windows	> 28
<b>5.   mcr LAM</b>	<b>&gt; 30</b>
5.1.   mcr LAM louvered vents	> 32
<b>6.   mcr PROSMOKE</b>	<b>&gt; 34</b>
6.1.   mcr PROSMOKE smoke curtains	> 36

## SMOKE EXHAUST PRODUCTS

Continous rooflights with smoke vent




**mcr PROLIGHT**

Certificate of constancy of performance  
1396-CPR-0039  
(EN 12101-2)

Natural lighting, ventilating, roof accessibility increase

Smoke vent single and double leaf

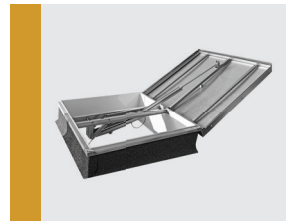

**mcr PROLIGHT**

Certificate of constancy of performance  
1396-CPR-0040  
(EN 12101-2)

Smoke, fire fumes and heat energy removal

Skylight fixed skylights



**mcr PROLIGHT**

Certificate of constancy of performance  
(EN 1873)

Natural lighting, ventilating

Roof hatch with straight base



**mcr PROLIGHT**

Certificate of constancy of performance  
(EN 1873)

Natural light inrease, ventilating, roof accessibility increase

Smoke vent



**mcr ULTRA THERM**

Certificate of constancy of performance  
1396-CPR-0126  
(EN 12101-2)

Smoke, fire fumes and heat energy removal

Skylight



**mcr ULTRA THERM**

Certificate of constancy of performance  
(EN 1873)

Natural lighting, ventilating

Roof hatch



**mcr ULTRA THERM**

Certificate of constancy of performance  
(EN 1873)

Natural lighting, ventilating, roof accessibility increase

Smoke vent



**mcr S-THERM**

Certificate of constancy of performance  
1396-CPR-0195  
(EN 12101-2)

Smoke, fire fumes and heat energy removal  
Natural lighting, ventilating increase

Louvered smoke ventilation vents



**mcr LAM**

Certificate of constancy of performance  
1396-CPR-0032  
(EN 12101-2)

Smoke, hot combustion gases and heat energy removal

Smoke exhaust window



**mcr OSO THERM**

Certificate of constancy of performance  
1396-CPR-0128  
(EN 12101-2)

Flames, fire gas and heat energy removal  
Aeration and daily ventilation

Smoke curtain



**mcr PROSMOKE**

Certificate of constancy of performance  
1396-CPR-033, -021, -022, -0037  
(EN 12101-1)

Smoke separation  
Smoke flow direction



## 1.1 mcr PROLIGHT | continous rooflights

### 1.1.1 | Description

- » continous rooflights with span up to 6,0 m
- » products are delivered to construction site in elements and assemble in two steps:
  - first step - base
  - second step - top section and smoke ventilation vents
- » RAL palette colour selection for elements
- » soft body impact resistance up to 1200 J
- » CE marked rooflights according to EN 14963
- » fire performance for external fire, class B<sub>ROOF</sub> (t1) as per EN 13501
- » wide scope of smoke vent sizes:
  - single-leaf:**  
(W x L) 100 x 100 cm ÷ 200 x 250 cm
  - double-leaf:**  
(W x L) 100 x 100 cm ÷ 250 x 250 cm
- » optional wind - and/or inlet deflector for better aerodynamic performance

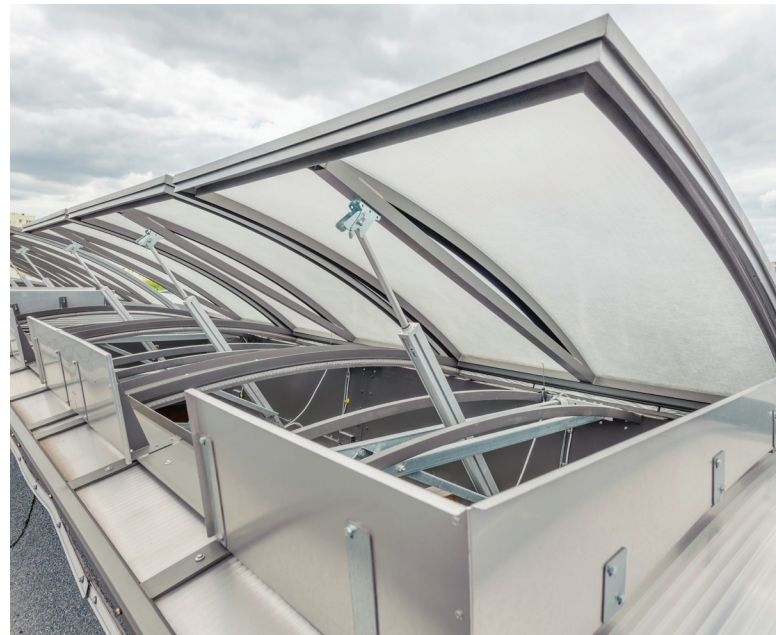


Fig. 1 - mcr PROLIGHT continous rooflight with open leaf and wind inlets

### Design

#### Base

- » type: straight, shaped to go along or across the ridge
- » height: 30 cm - 70 cm
- » material: steel, aluminum
- » prepared insulation of 50 mm thickness (possible modification)
- » possible to apply on existing plinth

#### Filling

- » multi-chamber polycarbonate
- » multivariable single and multi-layer filling

#### Control system

- » smoke exhaust: electric (24 V-), pneumatic
- » ventilation: electric (24 V - / 230 V ~)



BIM and CAD models are available through our QR code and on our website, in designer zone section

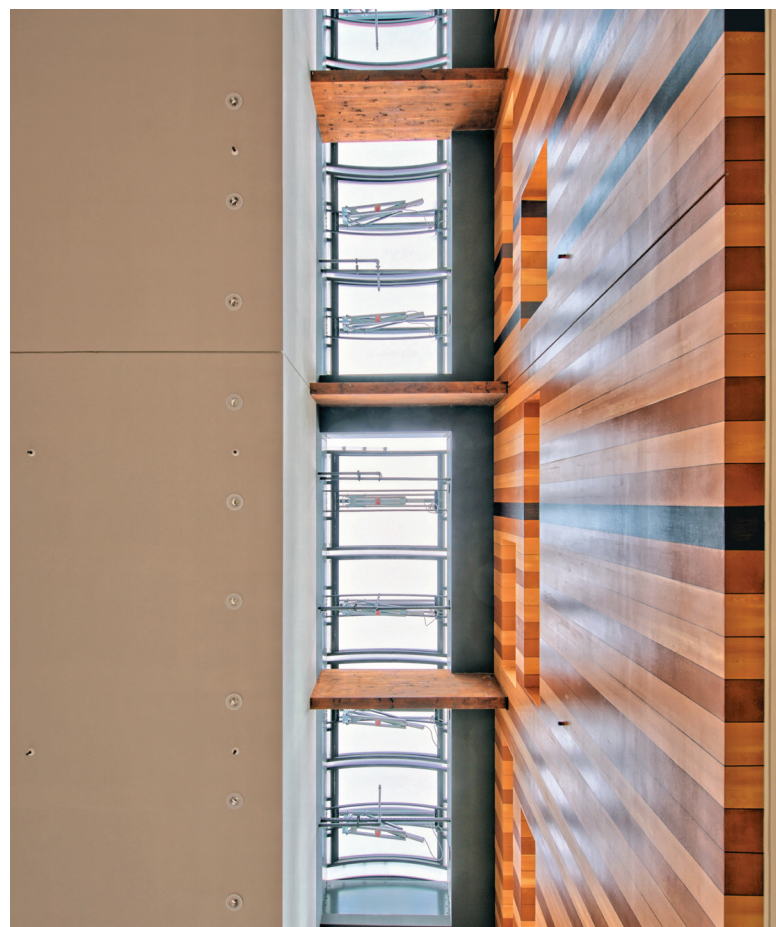


Fig. 2 - mcr PROLIGHT continous rooflight - inside view

### 1.1.2 | Features



#### lighting

effective method of increasing natural light intensity in rooms and contribute to reducing total cost of energy



#### smoke exhaust

exhaust smoke, combustion gases and heat energy from enclosed spaces (production floors, storage spaces, public facilities, etc.) to the outside of buildings, in order to protect human lives and property



#### ventilation

provides air supply and daily ventilation



#### heat transfer

product allows to achieve high heat transfer  $U_{rc} \geq 0,95 \text{ W/m}^2\text{K}$ .



#### application

wide scope of shapes and sizes enable installation on warehouses, public services buildings, shopping malls, commercial and sport objects



#### additional elements

- » anti-burglar grid
- » safety net
- » limit switch

### 1.1.3 | Certification



Smoke vents in rooflights are certified according to EN 12101-2 and CE-marked



Rooflights mcr PROLIGHT obtained environmental declaration showing environmental impact of the product - from sources extraction to transport



Fig. 3 - mcr PROLIGHT continous rooflight with open vent



Fig. 4 - mcr PROLIGHT continous rooflights settled on warehouse



## 1.2 mcr PROLIGHT | smoke vents

### 1.2.1 | Description

- » various vent types and dimensions
- » wide scope of sizes:
  - single-leaf:**  
(W x L) 100 x 100 cm ÷ 200 x 250 cm
  - double-leaf:**  
(W x L) 120 x 250 cm ÷ 300 x 300 cm
- » optional wind - and/or inlet deflector for better aerodynamic performance
- » vents are delivered to site construction as a complete product, ready to install
- » RAL palette colour selection for vent elements

#### DESIGN

##### Base

- » type: straight, skew
- » height: 20 cm - 70 cm
- » material: steel, aluminum
- » thermal insulation with mineral wool or PIR panel
- » possible to apply on existing plinth

##### Filling

- » multi-chamber polycarbonate
- » domes: acrylic or solid polycarbonate
- » sandwich panel
- » multivariable single and multi-layer filling

##### Control system

- » smoke exhaust: electric (24 V-), pneumatic, mechanic (gas springs)
- » ventilation: electric (230 V ~), pneumatic



BIM and CAD models are available through our QR code and on our website, in designer zone section



Fig. 5 - mcr PROLIGHT single leaf smoke vent, open



Fig. 6 - mcr PROLIGHT double leaf smoke vents

### 1.2.2 | Features



#### smoke exhaust

exhaust smoke, combustion gases and heat energy from enclosed spaces (production floors, storage spaces, public facilities, etc.) to the outside of buildings, in order to protect human lives and property



#### roof access

opening mechanism enables easy roof access



#### lighting

effective method of increasing natural light intensity in rooms and contribute to reducing total cost of energy



#### heat transfer

product allows to achieve high heat transfer  $U_{rc} \geq 1,1 \text{ W/m}^2\text{K}$ .



#### ventilation

provides air supply and daily ventilation



#### additional elements

- » roof access option
- » wind deflectors / inlet deflectors
- » anti-burglar grid
- » safety net
- » overlay base N type
- » limit switch

### 1.2.3 | Certification



Product certified according to EN 12101-2, CE-marked



mcr PROLIGHT smoke vents obtained environmental declaration showing environmental impact of the product - from sources extraction to transport



Fig. 7 - mcr PROLIGHT single leaf smoke vents, open



Fig. 8 - mcr PROLIGHT double leaf smoke vents, open



## 1.3 mcr PROLIGHT | skylights

### 1.3.1 | Description

- » fixed skylight, openable skylight with ventilation function
- » vast range of skylight types and sizes
- » wide scope of sizes:  
square: (W x L) 80 x 80 cm ÷ 210 x 210 cm  
rectangular: (W x L) 100 x 110 cm ÷ 200 x 300 cm
- » skylights are delivered as a complete product, ready to install
- » external fire resistance, class B<sub>ROOF</sub>(t1) according to EN 13501-5
- » RAL palette colour selection for skylight elements

#### DESIGN

##### Base

- » type: straight, skew
- » height: 20 cm - 70 cm
- » material: steel, aluminum
- » thermal insulation with mineral wool or PIR panel
- » possible to apply on existing plinth

##### Filling

- » multi-chamber polycarbonate
- » domes: acrylic or solid polycarbonate
- » multivariable single and multi-layer filling

##### Control system

- » ventilation: electric (230 V ~)



BIM and CAD models are available through our QR code and on our website, in designer zone section



Fig. 9 - mcr PROLIGHT skylights



Fig. 10 - mcr PROLIGHT skylights

### 1.3.2 | Features



#### lighting

effective method of increasing natural light intensity in rooms and contribute to reducing total cost of energy



#### ventilation

provides air supply and daily ventilation



#### heat transfer

product allows to achieve high heat transfer  $U_{rc} \geq 1,1 \text{ W/m}^2\text{K}$ .



#### application

wide scope of shapes and sizes enable installation on warehouses, public services buildings, shopping malls, commercial and sport objects



#### additional elements

- » anti-burglar grid
- » safety net
- » overlay base N type
- » limit switch

### 1.3.3 | Certification



Product acquires CE mark confirming compatibility with EN 1873 norm



mcr PROLIGHT skylights obtained environmental declaration showing environmental impact of the product - from sources extraction to transport



Fig. 11 - mcr PROLIGHT skylight



Fig. 12 - mcr PROLIGHT skylight



## 1.4 mcr PROLIGHT | roof hatches

### 1.4.1 | Description

- » wide scope of sizes:
  - square:**  
(W x L) 80 x 80 cm ÷ 140 x 140 cm
  - rectangular:**  
(W x L) 80 x 90 cm ÷ 120 x 150 cm
- » hatches are delivered to construction site as a complete product, ready to install
- » RAL palette colour selection for vent elements

#### DESIGN

##### Base

- » type: straight, skew
- » height: 20 cm - 75 cm
- » material: steel, aluminum
- » thermal insulation with mineral wool or PIR panel
- » possible to apply on existing plinth

##### Filling

- » multi-chamber polycarbonate
- » domes: acrylic or solid polycarbonate
- » multivariable single and multi-layer filling

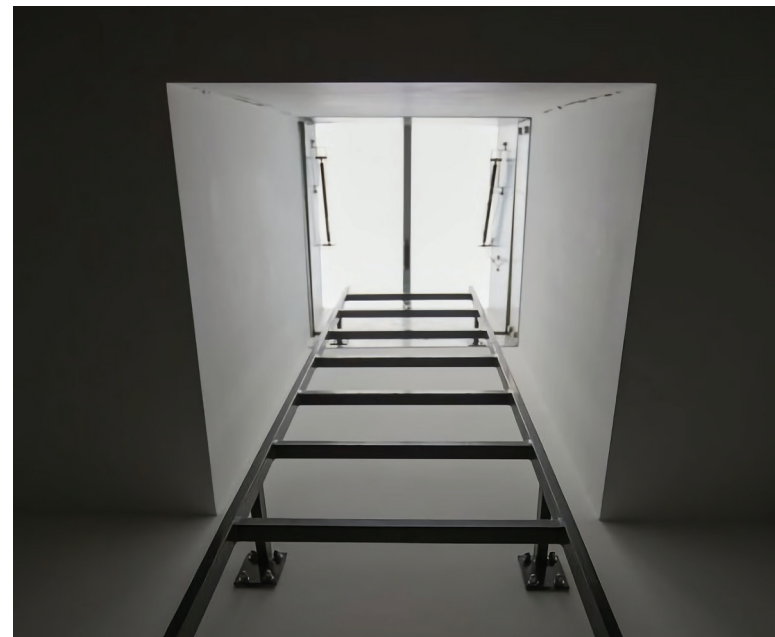


Fig. 13 - mcr PROLIGHT roof hatch



BIM and CAD models are available through our QR code and on our website, in designer zone section



Fig. 14 - mcr PROLIGHT roof hatch

### 1.4.2 | Features



#### lighting

effective method of increasing natural light intensity in rooms and contribute to reducing total cost of energy



#### ventilation

provides air supply and daily ventilation



#### roof access

opening mechanism enables easy roof access



#### application

wide scope of shapes and sizes enable installation on warehouses, public services buildings, shopping malls, commercial and sport objects



#### additional elements

- » roof access option
- » anti-burglar grid
- » safety net
- » overlay base N type
- » limit switch



#### heat transfer

product allows to achieve high heat transfer  $U_{rc} \geq 1,1 \text{ W/m}^2\text{K}$ .

### 1.4.3 | Certification



Product acquires CE mark, confirming compatibility with EN 1873 norm



mcr PROLIGHT roof hatches obtained environmental declaration showing environmental impact of the product - from sources extraction to transport

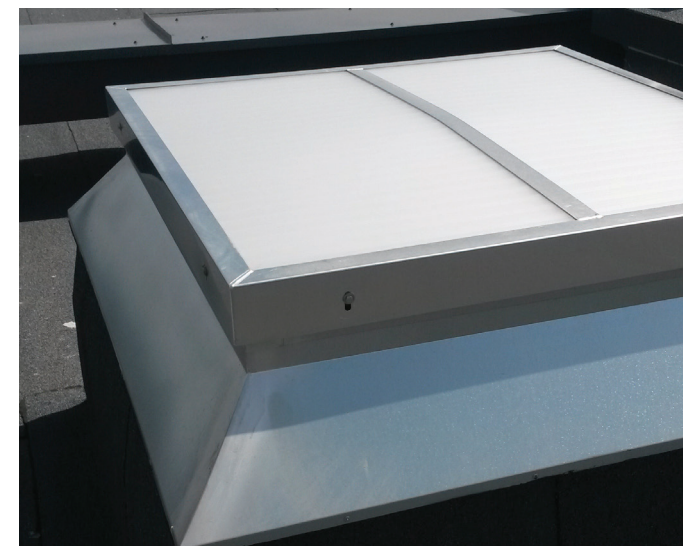


Fig. 15 - mcr PROLIGHT roof hatch



Fig. 16 - mcr PROLIGHT roof hatch with safety net



## 2.1 mcr ULTRA THERM | smoke vents

### 2.1.1 | Description

- » high thermal insulation
- » no thermal bridges
- » various shapes and base materials
- » wide scope of vents sizes:
  - square: (W x L) 100 x 100 cm ÷ 210 x 210 cm
  - rectangular: (W x L) 80 x 120 cm ÷ 200 x 300 cm
- » optional wind - and/or inlet deflector for better aerodynamic performance
- » partial or complete product delivery
- » RAL palette colour selection for steel and aluminum bases
- » aesthetic design

#### DESIGN

##### Base

- » type: straight, skew
- » height: 30 cm - 70 cm
- » material: PVC, steel, aluminum
- » steel or aluminum base prepared for insulation of 50 mm thickness
- » possible to instal on existing plinth

##### Filling

- » multi-chamber polycarbonate
- » domes: acrylic or solid polycarbonate
- » sandwich panel
- » multivariable single and multi-layer filling

##### Control system

- » smoke exhaust: pneumatic, electric (24 V- / 48 V-)
- » ventilation: electric (230 V~)



BIM and CAD models are available through our QR code and on our website, in designer zone section



Fig. 17 - mcr ULTRA THERM smoke vents



Fig. 18 - mcr ULTRA THERM smoke vent, open

### 2.1.2 | Features



#### smoke exhaust

exhaust smoke, combustion gases and heat energy from enclosed spaces (production floors, storage spaces, public facilities, etc.) to the outside of buildings, in order to protect human lives and property



#### ventilation

provides air supply and daily ventilation



#### lighting

effective method of increasing natural light intensity in rooms and contribute to reducing total cost of energy



#### additional elements

- » wind deflectors
- » inlet deflectors
- » safety net
- » limit switch



#### roof access

opening mechanism enables easy roof access



#### heat transfer

product allows to achieve high heat transfer  $U_{rc} \geq 0,8 \text{ W/m}^2\text{K}$ .

### 2.1.3 | Certification



Product certified according to EN 12101-2, CE-marked



mcr ULTRA THERM smoke vents obtained environmental declaration showing environmental impact of the product - from sources extraction to transport

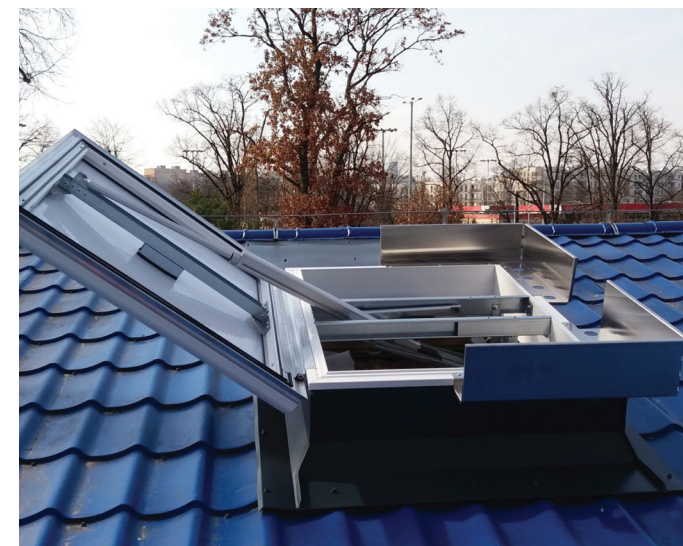


Fig. 19 - mcr ULTRA THERM smoke vents

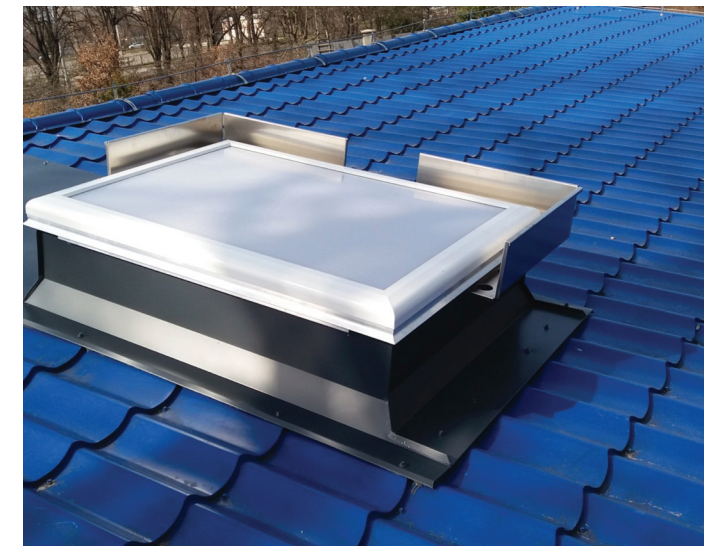


Fig. 20 - mcr ULTRA THERM smoke vents



## 2.2 mcr ULTRA THERM | skylights

### 2.2.1 | Description

- » fixed skylight, openable skylight with ventilation function
- » high thermal insulation
- » no thermal bridges
- » various shapes and base materials
- wide scope of skylight sizes:
  - square:**  
(W x L) 80 x 80 cm ÷ 190 x 190 cm
  - rectangular:**  
(W x L) 80 x 120 cm ÷ 200 x 300 cm
- » partial or complete product delivery
- » RAL palette colour selection for steel and aluminum bases
- » aesthetic design
- » resistance to external fire, B<sub>ROOF</sub>(t1) class according to EN 13501-5 (optional)

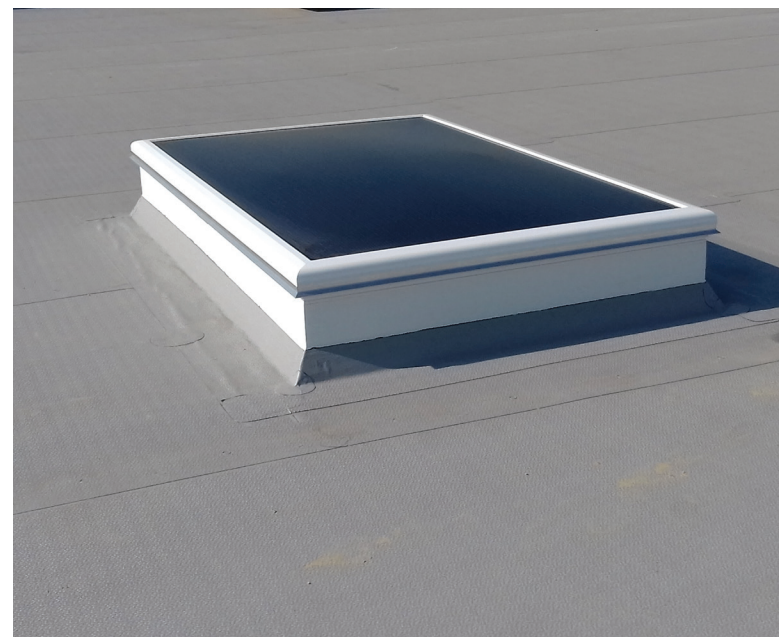


Fig. 20 - mcr ULTRA THERM skylight

#### DESIGN

##### Base

- » type: straight, skew
- » height: 30 cm - 70 cm
- » material: PVC, steel, aluminum
- » steel or aluminum base prepared for insulation of 50 mm thickness

##### Filling

- » multi-chamber polycarbonate
- » domes: acrylic or solid polycarbonate
- » multivariable single and multi-layer filling

##### Control system

- » ventilation: electric (230 V~)

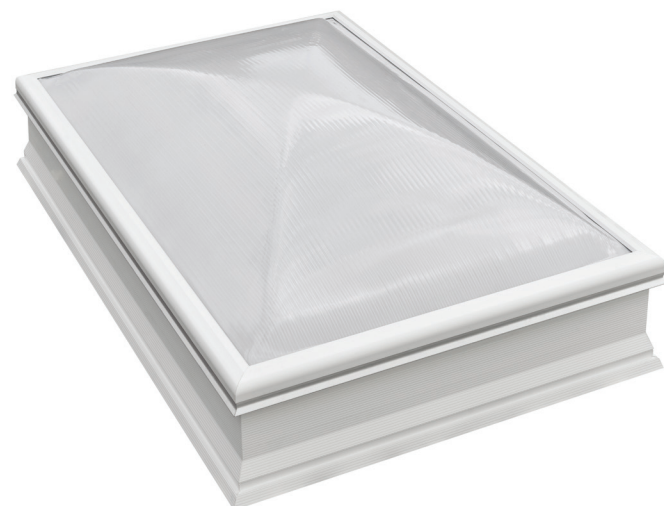


Fig. 21 - mcr ULTRA THERM skylight

### 2.2.2 | Features



#### lighting

effective method of increasing natural light intensity in rooms and contribute to reducing total cost of energy



#### ventilation

provides air supply and daily ventilation



#### heat transfer

product allows to achieve high heat transfer  $U_{rc} \geq 0,8 \text{ W/m}^2\text{K}$ .



#### application

wide scope of shapes and sizes enable installation on warehouses, public services buildings, shopping malls, commercial and sport objects



#### additional elements

- » safety net
- » limit switch

### 2.2.3 | Certification



Product acquires CE mark confirming compatibility with EN 1873 norm



mcr ULTRA THERM skylights obtained environmental declaration showing environmental impact of the product - from sources extraction to transport

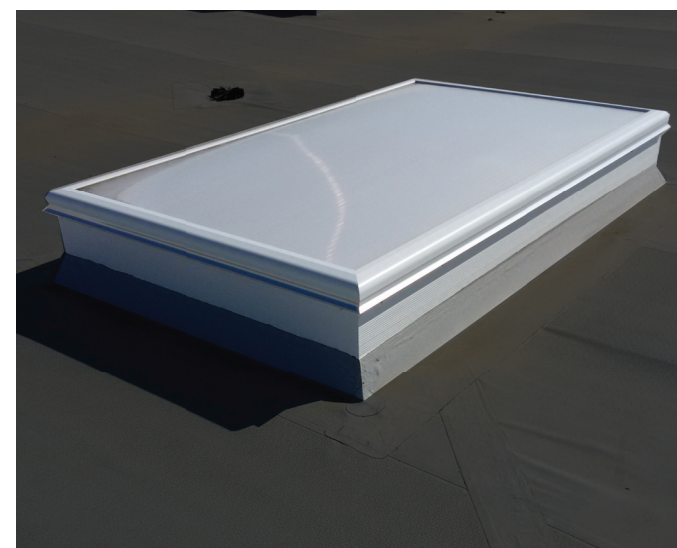


Fig. 22 - mcr ULTRA THERM skylight



Fig. 23 - mcr ULTRA THERM skylight



BIM and CAD models are available through our QR code and on our website, in designer zone section



## 2.3 mcr ULTRA THERM | roof hatches

### 2.3.1 | Description

- » high thermal insulation
- » no thermal bridges
- » various shapes and base materials
- » wide scope of hatches sizes:
  - square: (W x L) 80 x 80 cm ÷ 140 x 140 cm
  - rectangular: (W x L) 80 x 90 cm ÷ 130 x 140 cm
- » partial or complete product delivery
- » RAL palette colour selection for steel and aluminum bases
- » aesthetic design

#### DESIGN

##### Base

- » type: straight, skew
- » height: 30 cm - 70 cm
- » material: PVC, steel, aluminum
- » steel or aluminum base prepared for insulation of 50 mm thickness

##### Filling

- » multi-chamber polycarbonate
- » domes: acrylic or solid polycarbonate
- » multivariable single and multi-layer filling

##### Control system

- » gas springs



Fig. 24 - mcr ULTRA THERM roof hatch

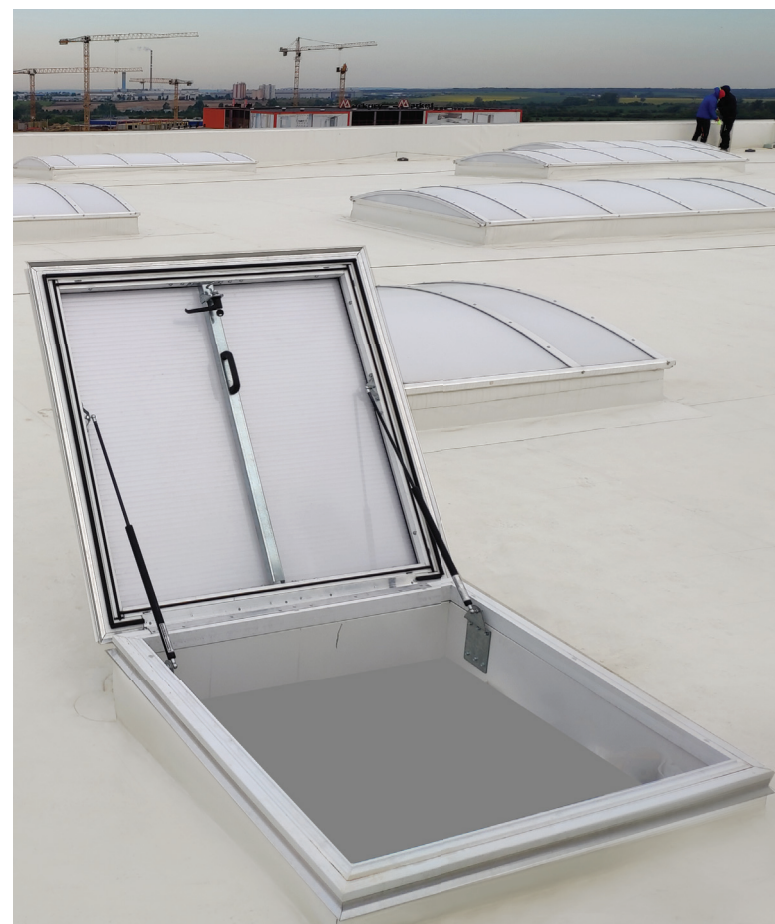


Fig. 25 - mcr ULTRA THERM roof hatch

### 2.3.2 | Features



#### lighting

effective method of increasing natural light intensity in rooms and contribute to reducing total cost of energy



#### roof access

opening mechanism enables easy roof access



#### ventilation

provides air supply and daily ventilation



#### application

wide scope of shapes and sizes enable installation on warehouses, public services buildings, shopping malls, commercial and sport objects



#### additional elements

- » roof access
- » safety net



#### heat transfer

product allows to achieve high heat transfer  $U_{rc} \geq 0,8 \text{ W/m}^2\text{K}$ .

### 2.3.3 | Certification



Product acquires CE mark confirming compatibility with EN 1873 norm



mcr ULTRA THERM roof hatch obtained environmental declaration showing environmental impact of the product - from sources extraction to transport

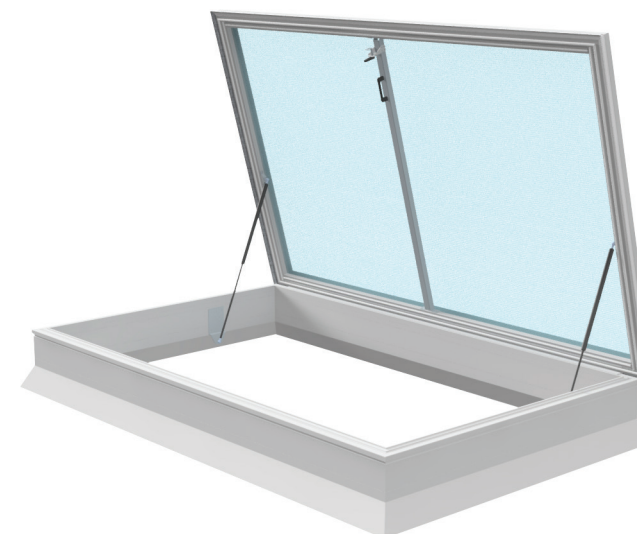


Fig. 26 - mcr ULTRA THERM roof hatch, PVC base

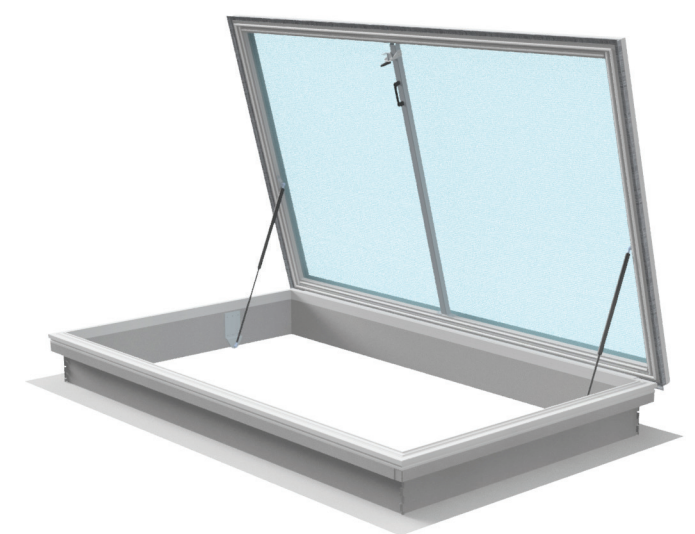


Fig. 27 - mcr ULTRA THERM roof hatch, steel base



BIM and CAD models are available through our QR code and on our website, in designer zone section

## 3.1 mcr S-THERM | smoke vents, skylights

### 3.1.1 | Description

- » no thermal bridges, reduction of water vapour condensation
- » high aesthetics, use of extruded aluminum profiles, wooden base option
- » modular design enables work ergonomics during assembly and transport
- » wide scope of vents sizes:
  - square:**  
(W x L) 100 x 100 cm ÷ 180 x 180 cm
  - rectangular:**  
(W x L) 150 x 250 cm ÷ 190 x 260 cm
- » optional wind - and/or inlet deflector for better aerodynamic performance
- » simple replacement of vent elements - filling, thickness, type and colour change
- » RAL palette colour selection for vent elements

#### DESIGN

##### Base

- » type: straight, skew
- » height: 20 cm - 70 cm
- » material: steel, wood
- » prepared for insulation of 50 mm thickness
- » delivered in assembly components
- » possible to apply on existing plinth

##### Filling

- » multi-chamber polycarbonate
- » domes: acrylic or solid polycarbonate
- » sandwich panel
- » multivariable single and multi-layer filling

##### Control system

- » smoke exhaust: electric (24 V- / 48 V-) pneumatic, mechanic (gas springs)
- » ventilation: electric (230 V~), pneumatic



BIM and CAD models are available through our QR code and on our website, in designer zone section



Fig. 28 - mcr S-THERM smoke vent with open leaf



Fig. 29 - mcr S-THERM smoke vent with open leaf

### 3.1.2 | Features



#### smoke exhaust

exhaust smoke, combustion gases and heat energy from enclosed spaces (production floors, storage spaces, public facilities, etc.) to the outside of buildings, in order to protect human lives and property



#### lighting

effective method of increasing natural light intensity in rooms and contribute to reducing total cost of energy



#### ventilation

provides air supply and daily ventilation



#### application

wide scope of shapes and sizes enable installation on warehouses, public services buildings, shopping malls, commercial and sport objects



#### additional elements

- » wind deflectors (C, E)
- » inlet deflectors
- » anti-burglar grid
- » safety net
- » limit switch



#### heat transfer

product allows to achieve high heat transfer  $U_{rc} \geq 0,9 \text{ W/m}^2\text{K}$ .

### 3.1.3 | Certification



Product certified according to EN 12101-2, CE-marked

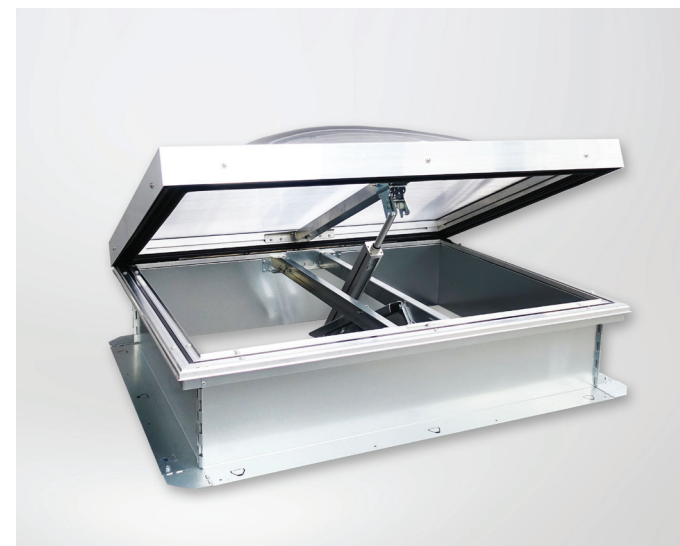


Fig. 30 - mcr S-THERM smoke vent with open leaf

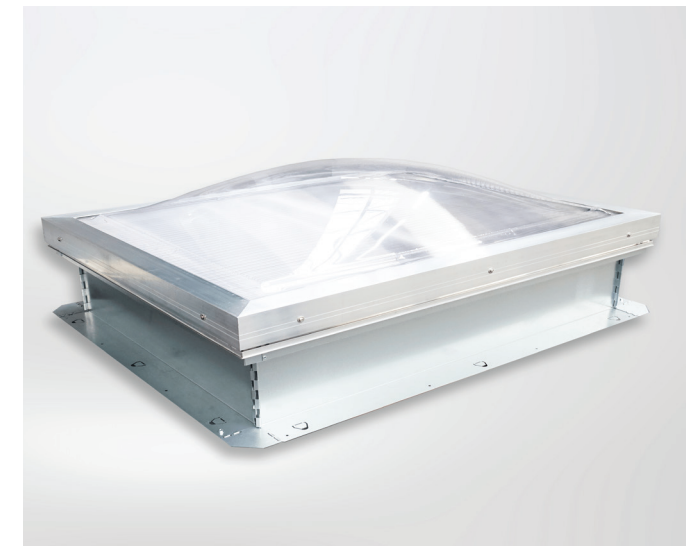


Fig. 31 - mcr S-THERM smoke vent with closed leaf



## 4.1 mcr OSO THERM | window exhaust system

### 4.1.1 | Description

- » smoke exhaust and ventilation window types: top hung opening outward; top hung opening inward; bottom hung opening outward; bottom hung opening inward
- » wide scope of window sizes:
  - horizontal set-up:**  
(W x H) 800 x 800 mm ÷ 2000 x 1700 mm / 2600 x 2200 mm
  - vertical set-up:**  
(W x H) 800 x 800 mm ÷ 2700 x 1300 mm
- » wide selection of RAL palette colours and decorative woodgrain coating

#### DESIGN

- » multi-chamber aluminum profiles
- » leaf and frame groove system with covering profile for easy installation of cables and actuators consoles

#### Filling

- » triple glass
- » double glass
- » sandwich panel

#### Control system

- » smoke exhaust: electric: 24 V- / 46 V-
- » ventilation (230 V~)



BIM and CAD models are available through our QR code and on our website, in designer zone section



Fig. 32 - mcr OSO THERM smoke exhaust windows open



Fig. 33 - mcr OSO THERM smoke exhaust windows,

### 4.1.2 | Features



#### smoke exhaust

exhaust smoke, combustion gases and heat energy from enclosed spaces (production floors, storage spaces, public facilities, etc.) to the outside of buildings, in order to protect human lives and property



#### lighting

effective method of increasing natural light intensity in rooms and contribute to reducing total cost of energy



#### ventilation

provides air supply and daily ventilation



#### application

wide scope of shapes and sizes enable installation on warehouses, public services buildings, shopping malls, commercial and sport objects



#### non-standard options

- » possibility of making bi-colour windows
- » decorative bars referring to old or modern architecture
- » glazing bars



#### heat transfer

product allows to achieve high heat transfer  $U_{rc} < 0,8 \text{ W/m}^2\text{K}$ .

### 4.1.3 | Certification



Product acquires CE mark confirming compatibility with EN 12101-2



Fig. 34 - mcr OSO THERM smoke exhaust windows, open



Fig. 35 - mcr OSO THERM smoke exhaust windows, open



## 5.1 mcr LAM | louvered smoke, ventilation vents

### 5.1.1 | Description

- » mcr LAM louvered smoke vents are assembled to roof slope with various angles and facades
- » due to its construction louvered vents are resistant to wind and can be installed to roofs and high building facades
- » vast range of sizes allow to obtain necessary active area
- » wide scope of sizes:  
80 x 50 cm ÷ 380 x 250 cm
- » RAL palette colour selection for vent elements

#### DESIGN

##### Base

- » height: 15 ÷ 25 cm
- » material: steel, aluminum
- » thermal insulation with mineral wool of 20 mm thickness

##### Blades

- » types: transparent, non-transparent
- » structure: aluminum profiles, multi-chamber polycarbonate or aluminum insulated/ noninsulated sheet

##### Control system

- » smoke exhaust: electric (24 V-), pneumatic
- » ventilation: electric (24 V-), pneumatic



BIM and CAD models are available through our QR code and on our website, in designer zone section



Fig. 36 - mcr LAM louvered vent, roof mounted



Fig. 37 - mcr LAM louvered vent, facade mounted

### 5.1.2 | Features



#### smoke exhaust

exhaust smoke, combustion gases and heat energy from enclosed spaces (production floors, storage spaces, public facilities, etc.) to the outside of buildings, in order to protect human lives and property



#### lighting

effective method of increasing natural light intensity in rooms and contribute to reducing total cost of energy



#### ventilation

provides air supply and daily ventilation



#### application

wide scope of shapes and sizes enable installation on warehouses, public services buildings, shopping malls, commercial and sport objects



#### additional elements

- » rain shield
- » thermo switch
- » limit switch

### 5.1.3 | Certification



Product acquires CE mark confirming compatibility with EN 12101-2



Fig. 38 - mcr LAM louvered vent, roof mounted - inside view

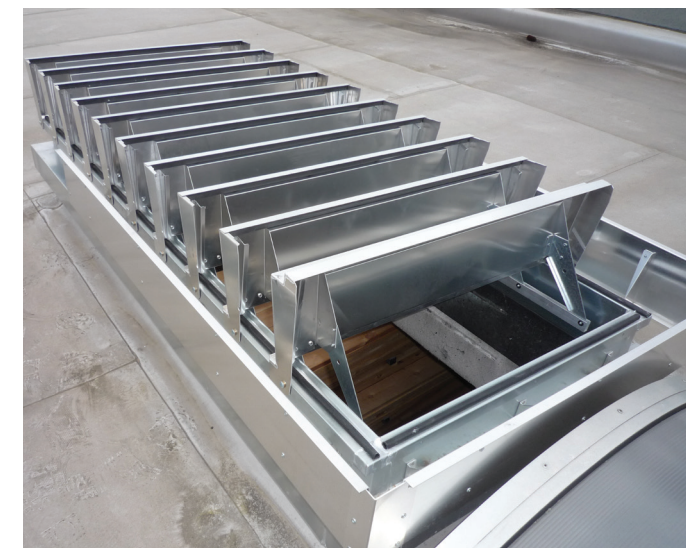


Fig. 39 - mcr LAM louvered vent, roof mounted



## 6.1 mcr PROSMOKE | smoke curtains

### 6.1.1 | Description

- » fire resistance parameters: automatic curtains: **D60/ DH60** or **D180**, fixed curtains: **DH60** (material) or **DH120** (steel)
- » vast range of curtain mounting to ceiling lintel or object construction
- » automatic curtain as onefoldedor modular device can
- » be connected under an angle or contain evacuation entrance
- » painting steel components with chosen RAL palette colour

#### DESIGN

##### Types

- » **mcr PROSMOKE ONE** - automatic smoke curtain
- » **mcr PROSMOKE CE** - automatic smoke curtain (rolled and unrolled with motor)
- » **mcr PROSMOKE FS** - automatic smoke curtain (fail-safe gravitational drop)
- » **mcr PROSMOKE S** - fixed fabric curtain
- » **mcr PROSMOKE ST** - fixed steel curtain

##### Automatic curtain - structure

- » steel sheet casing with roller
- » incombustible fabric
- » motor
- » bottom balast
- » masking element

##### Fixed control

- » **fixed fabric curtain:**
  - steel profile: load bearing and pressing
  - incombustible fabric
  - bottom balast
- » **fixed steel curtain:**
  - trapezoidal metal sheet
  - load bearing and bracing elements



BIM and CAD models are available through our QR code and on our website, in designer zone section

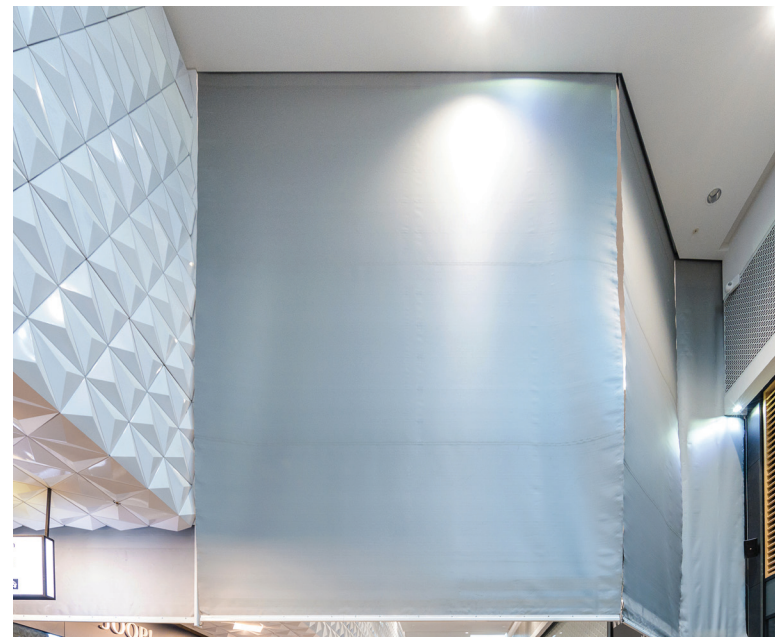


Fig. 40 - mcr PROSMOKE smoke curtain

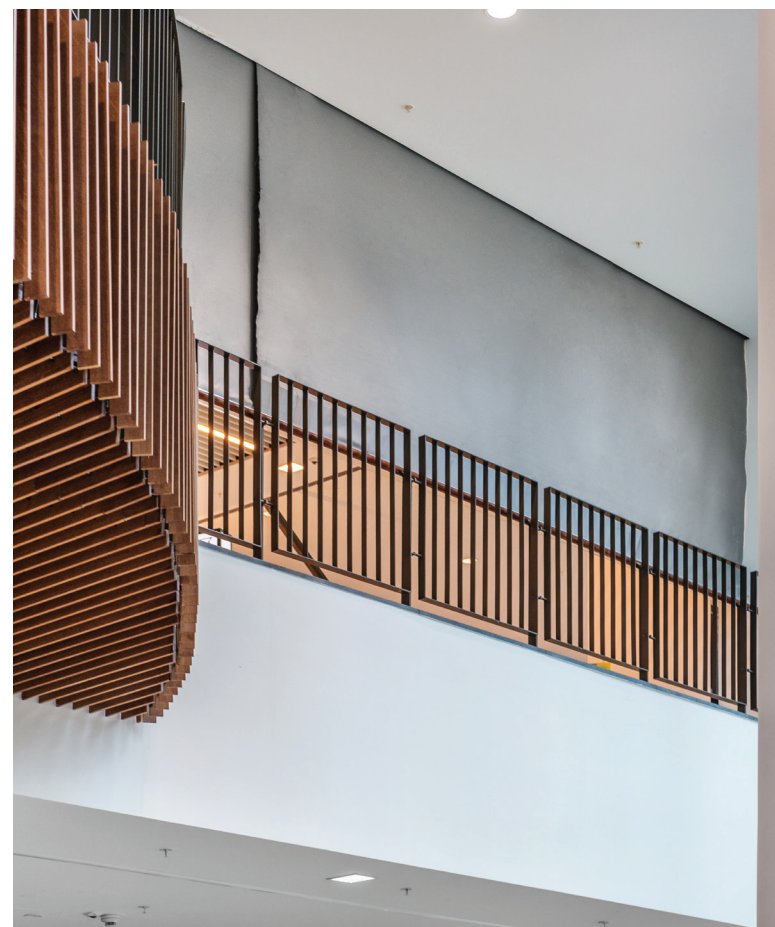


Fig. 41 - mcr PROSMOKE smoke curtain

### 6.1.2 | Features



#### separation of smoke zones

separated smoke zones stop the spread of smoke in passageways, staircases, stairs and hold the smoke in a room adjacent to the evacuation route



#### application

wide scope of shapes and sizes enable installation in warehouses, public services buildings, shopping malls, commercial and sport objects



#### smoke flow optimisation and gas redirection into smoke vents

proper placement of smoke curtains in a building makes it possible to direct the smoke towards other elements of the system, i.e. smoke vents



#### non-standard options

- » optional holes in the fabric
- » elements painted to any RAL colour

### 6.1.3 | Certification



Product acquires CE mark confirming compatibility with EN 12101-1

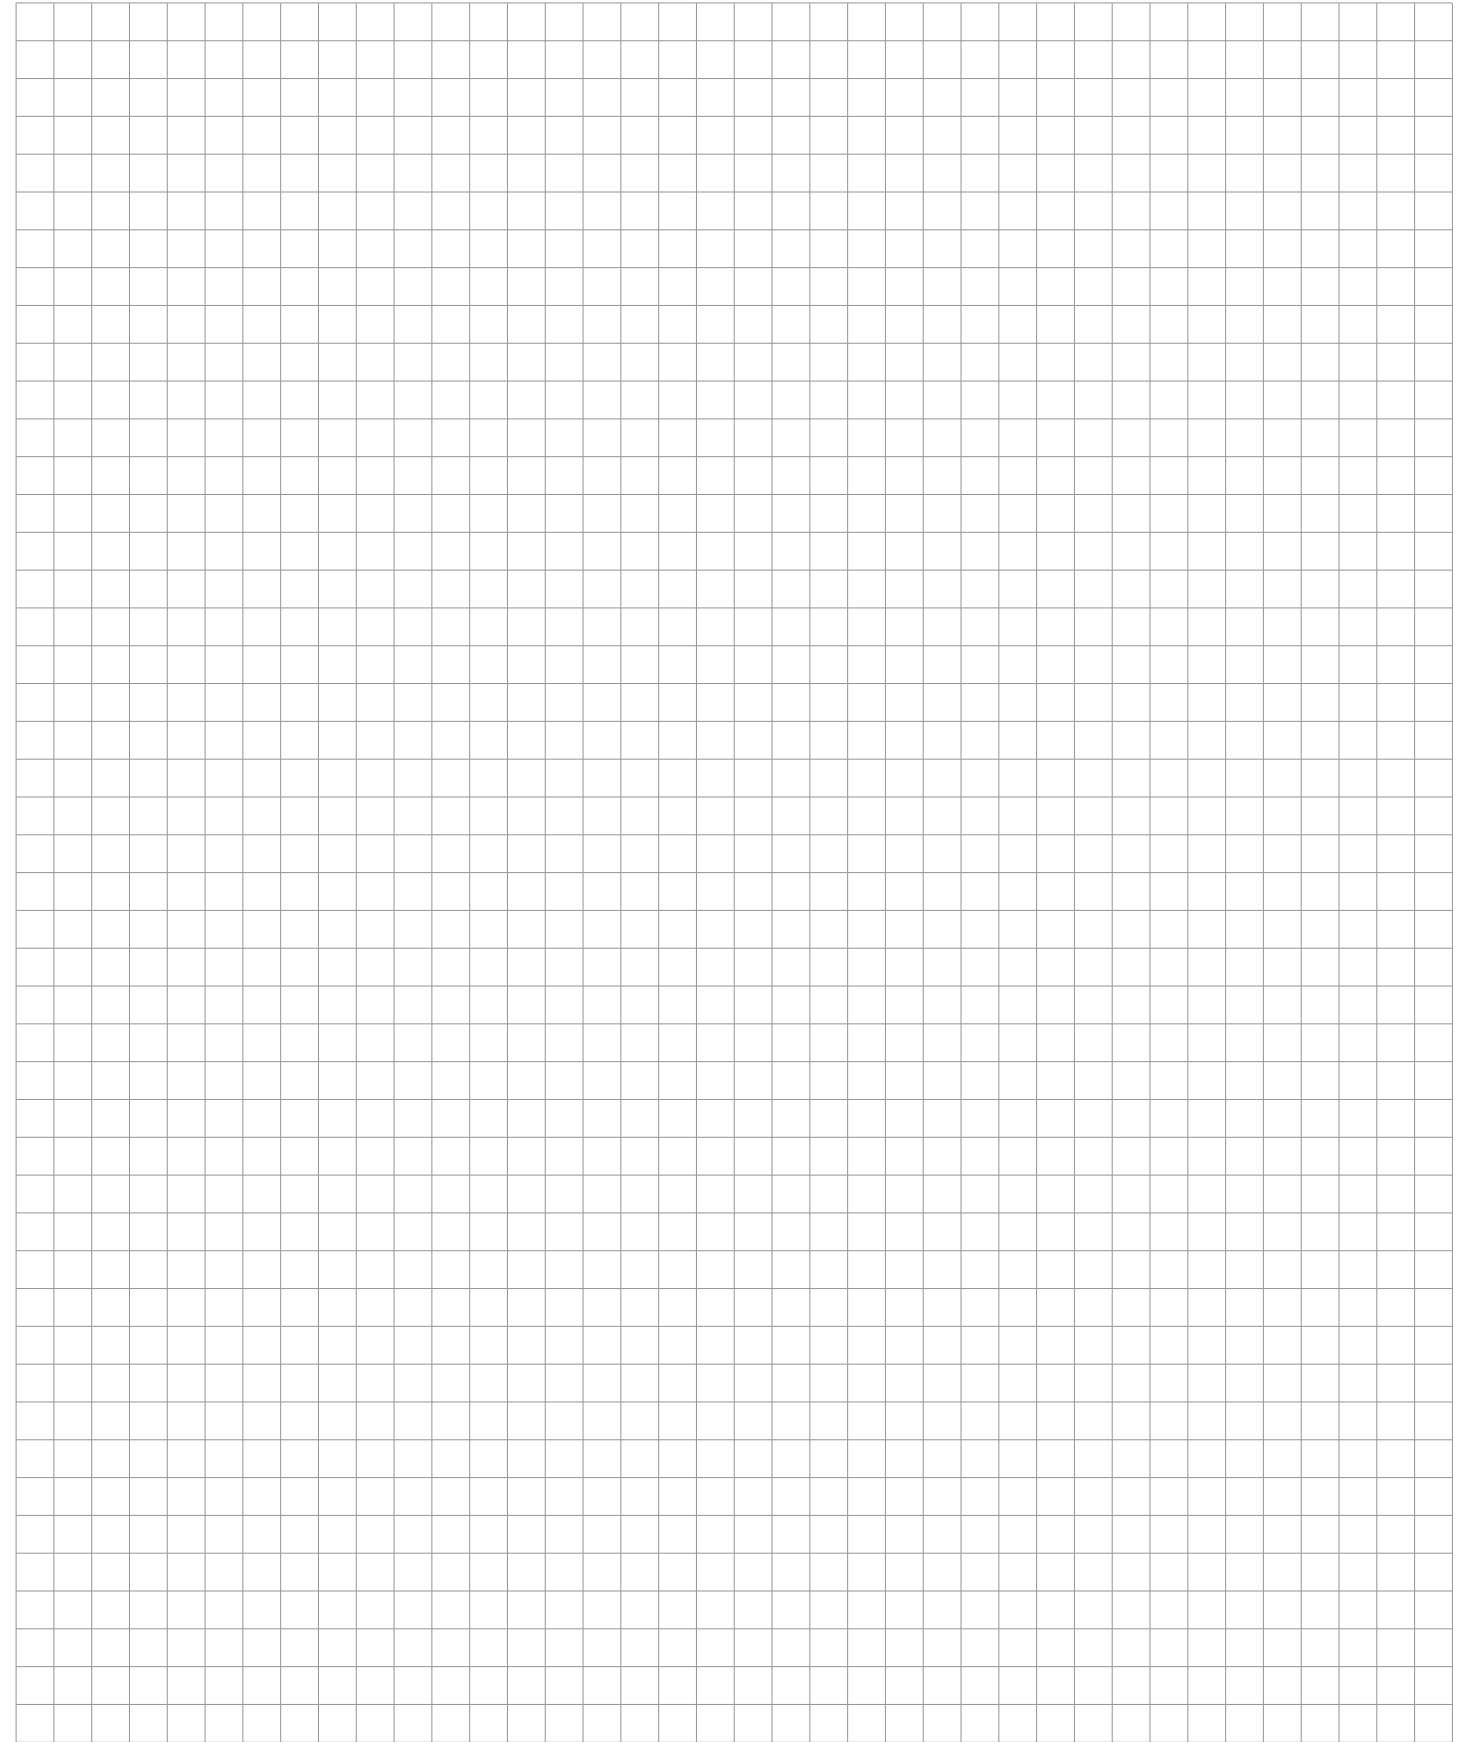


Fig. 42 - mcr PROSMOKE steel smoke curtain



Fig. 43 - mcr PROSMOKE smoke curtain









**„MERCOR” S. A.**

📍 ul. Grzegorza z Sanoka 2, 80-408 Gdańsk, Poland

☎ (+48) 58 341 42 45

☎ (+48) 58 341 39 85

✉ [export@mercorgroup.com.pl](mailto:export@mercorgroup.com.pl)

**MERCOR UKRAINE SP. Z O.O.**

**Ukraine**

[www.mercor.com.ua](http://www.mercor.com.ua)

📍 st. Yaroslav the Wise 9B

📍 79016 Lviv

☎ (+38) 032 242 03 46

☎ (+38) 067 313 63 57

✉ [info@mercorgroup.com.ua](mailto:info@mercorgroup.com.ua)

**MERCOR FIRE PROTECTION SYSTEMS S.C. S.R.L.**

**Romania**

[www.mercor.ro](http://www.mercor.ro)

📍 Drum Centura Chitila – Mogosoaia, no 3, floor 4

📍 Oras Chitila, Ilfov RO-077045

☎ (+40) 371 324 182

✉ [romania@mercorgroup.com](mailto:romania@mercorgroup.com)

**MERCOR TECRESA**

**Spain**

[www.mercortecresa.com](http://www.mercortecresa.com)

📍 C. Margarita Salas, 26

📍 28919 Leganés, Madrid

☎ (+34) 91 428 22 60

☎ (+34) 91 428 22 61

✉ [info@mercortecresa.com](mailto:info@mercortecresa.com)

**MERCOR SLOVAKIA S.R.O.**

**Slovakia**

[www.mercor-slovakia.sk](http://www.mercor-slovakia.sk)

📍 Galvaniho 7/D

📍 821 04 Bratislava

☎ (+421) 2 2062 0040

☎ (+421) 2 2062 0049

✉ [mercorgroup@slovakia.sk](mailto:mercorgroup@slovakia.sk)

**MERCOR CZECH REPUBLIC S.R.O.**

**Czech Republic**

[www.mercor-czech.cz](http://www.mercor-czech.cz)

📍 Letni 1122/1

📍 721 00 Ostrava Svinov

☎ (+420) 597 317 665

✉ [mercorgroup@mercorgroup-czech.cz](mailto:mercorgroup@mercorgroup-czech.cz)

**MERCOR - DUNAMENTI TŰZVÉDELEM ZRT.**

**Hungary**

[www.dunamenti.hu](http://www.dunamenti.hu)

📍 Nemeskéri Kiss Miklós utca 39

📍 2131 Göd

☎ (+36) 27 345 217

☎ (+36) 27 530 082

✉ [godcenter@dunamenti.hu](mailto:godcenter@dunamenti.hu)

**MERCOR FIRE PROTECTION UK LTD**

**England**

📍 Deanway 2 Suite 1 Ground Floor Wilmslow Road

📍 Handforth, SK9 3FB

☎ +44 (0) 7547 799 189

✉ [enquiries@mercorgroup-fp.co.uk](mailto:enquiries@mercorgroup-fp.co.uk)

[www.mercorgroup.com.pl/en/](http://www.mercorgroup.com.pl/en/)



[www.facebook.com/grupamercor/](http://www.facebook.com/grupamercor/)



[www.linkedin.com/company/mercorgroup/](http://www.linkedin.com/company/mercorgroup/)



[www.youtube.com/user/mercorgroup](http://www.youtube.com/user/mercorgroup)